

PAINTING and DRYING BOOTHS



Since its establishment, EMA-Tech introduced a new outlook toward coating systems, to be your leading partner in this field in Turkey.

Insisting on continuous R&D, EMA-Tech offers up-to-date and efficient products, which after installation, become as solutions for required applications.

Offering technological solution, EMA-Tech also provides customers with consultancy on fields of service, product supply and take in charge active projects. EMA-Tech offers professional installation of paintshop facilities as well as after-sales service and spare parts supply.

Adjustable projects, service experiences, approach and its quality, EMA-Tech provides fast & effective solutions for a wide range of products from a standard paint booth to multi component and complex coating line facilities.

Why EMA-Tech

High Performance / Optimum Cost

All EMA-Tech solutions are products which their possession investment and operation cost are at the optimum level. Integrated feature of our solution, combining with current technology eliminates the need for a separate investment in any certain field.

Scalable Solutions


EMA-Tech products included a wide range of product from a standard paint booth to complex a coating line facilities which are designed according to customer requirements. Scalable structure of products make it possible to extend them without thrown out of the initial investment . As a result a small started operation with smart moves, can be extended without enduring the severe costs.

Flexible and Integratable Solutions

All EMA-Tech solution are based on optimum operation cost and user freindly utilization. Our flexible structure which is open to integration with different approaches, provides you with efficient evaluations of potentials.

After Sales Support

Multi-component systems likes coating lines can bring about different needs and expectations after the installation. As a result editing requests in the existing system is unavoidable. Our support policy perspective to problems is not in EMA-Tech privacy, examination of all the point in the work environment and involves the sharing of solutions. The main goal is to ensure the detection of the problem and resolve the problem in optimum way.

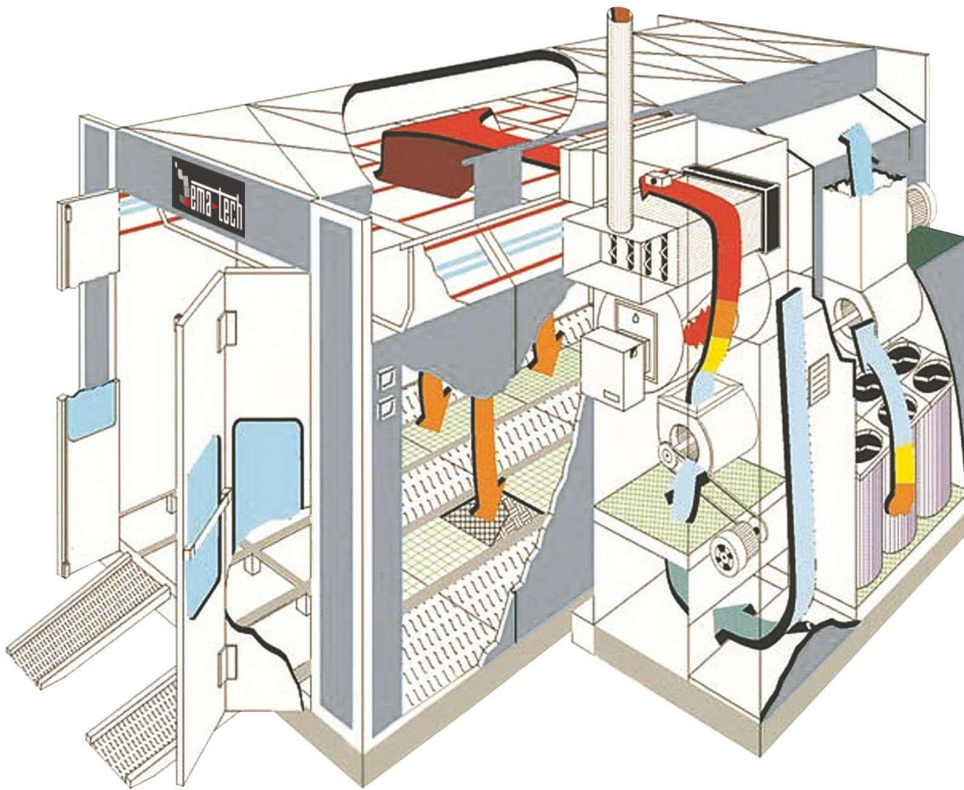**Elen 6**

AUTO PAINTING-DRYING SPRAY BOOHT

Elen 7

AUTO PAINTING-DRYING SPRAY BOOHT

Elen 8 TP



MINIBUS PAINTING-DRYING SPRAY BOOHT

Elen 10 LVV

COMMERCIAL CAR PAINTING-DRYING SPRAY BOOHT

Elen 15 BT

TRUCK PAINTING-DRYING SPRAY BOOHT

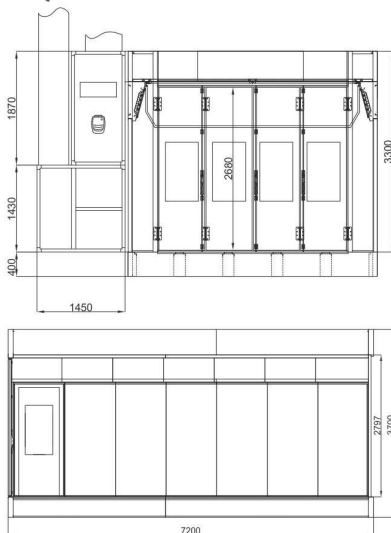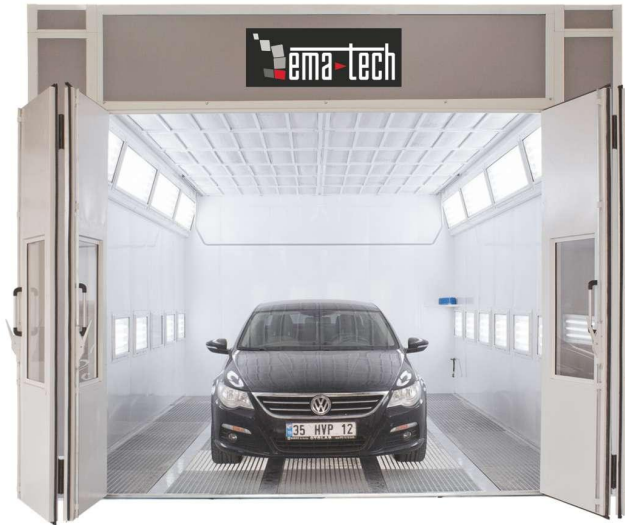

Our booths with painting and drying feature is designed to suit your needs with special features and adequate insulation to take control of your operating costs.




TECHNICAL SPECIFICATION

ELEN-7	APPLICATION TEMPERATURE	DRYING TEMPERATURE
	22°C - 25°C	60°C - 80°C

	UNIT	SCALED QUANTITY	
INT. DIMENSION	mm	7000(L)	4000(W) 2800(H)
EXT. DIMENSION	mm	7200(L)	4100(W) 3250(H)
LIGHTNING	W	32	X 58
MOTOR	KW	2	X 7,5
FAN CAPACITY	m ³ /h	2	X 24000
BURNER	Kcal/h	1	X 200000
ELECT. POWER	KW	TOTAL	20
VOLTAGE	V	max.	400

FEATURES

FEATURES	OK	OPTIONEL
SIDE LIGHTNING	<input type="checkbox"/>	<input checked="" type="checkbox"/>
NATURAL GAS BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PIPE COIL EXCHANGER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIRECT FIRE BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIESEL BURNER	<input checked="" type="checkbox"/>	<input type="checkbox"/>
PLC CONTROL	<input checked="" type="checkbox"/>	<input type="checkbox"/>
TOUCHSCREEN	<input checked="" type="checkbox"/>	<input type="checkbox"/>
DIRECT DRIVE FAN	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RECUPERATOR	<input type="checkbox"/>	<input checked="" type="checkbox"/>
FEQ. INVERTER CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERVIS DOOR	<input checked="" type="checkbox"/>	<input type="checkbox"/>
AIR CHANELS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BURNER CHIMNEY	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BASEMENT CONSTRUCT.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
PRESSURE CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PNEUMATIC RAMP	<input type="checkbox"/>	<input checked="" type="checkbox"/>
WATER BASED READY	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FULL GRATED	<input type="checkbox"/>	<input checked="" type="checkbox"/>
TWO LINES GRATED	<input checked="" type="checkbox"/>	<input type="checkbox"/>
SIDE EXTRACTION	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CROSSDRAFT	<input type="checkbox"/>	<input checked="" type="checkbox"/>
EX-PROOF LIGHTNING	<input type="checkbox"/>	<input checked="" type="checkbox"/>

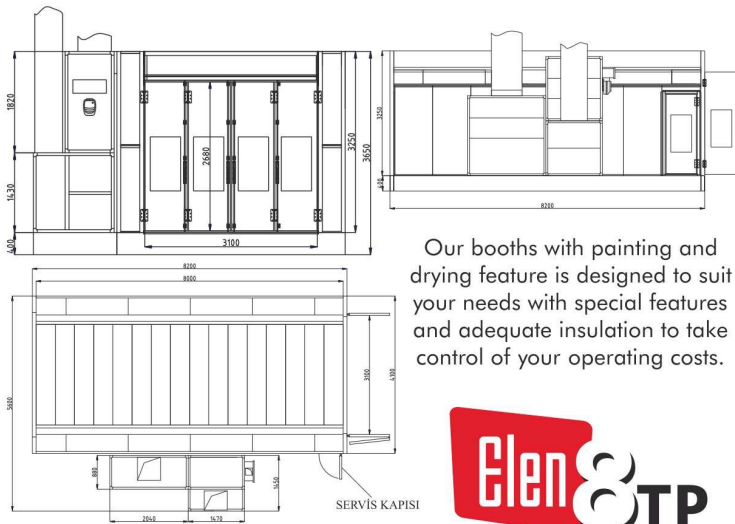

Our booths with painting and drying feature is designed to suit your needs with special features and adequate insulation to take control of your operating costs.



TECHNICAL SPECIFICATION

ELEN-8 TP	APPLICATION TEMPERATURE	DRYING TEMPERATURE
	22°C - 25°C	60°C - 80°C

	UNIT	SCALED QUANTITY	
INT. DIMENSION	mm	8000(L)	4000(W) 3000(H)
EXT. DIMENSION	mm	8200(L)	4100(W) 3450(H)
LIGHTNING	W	32	X 58
MOTOR	KW	2	X 7,5
FAN CAPACITY	m ³ /h	2	X 24000
BURNER	Kcal/h	1	X 200000
ELECT. POWER	KW	TOTAL	20
VOLTAGE	V	max.	400

FEATURES

FEATURES	OK	OPTIONEL
SIDE LIGHTNING	<input type="checkbox"/>	<input checked="" type="checkbox"/>
NATURAL GAS BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PIPE COIL EXCHANGER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIRECT FIRE BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIESEL BURNER	<input checked="" type="checkbox"/>	<input type="checkbox"/>
PLC CONTROL	<input checked="" type="checkbox"/>	<input type="checkbox"/>
TOUCHSCREEN	<input checked="" type="checkbox"/>	<input type="checkbox"/>
DIRECT DRIVE FAN	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RECUPERATOR	<input type="checkbox"/>	<input checked="" type="checkbox"/>
FEQ. INVERTER CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERVIS DOOR	<input checked="" type="checkbox"/>	<input type="checkbox"/>
AIR CHANELS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BURNER CHIMNEY	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BASEMENT CONSTRUCT.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
PRESSURE CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PNEUMATIC RAMP	<input type="checkbox"/>	<input checked="" type="checkbox"/>
WATER BASED READY	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FULL GRATED	<input type="checkbox"/>	<input checked="" type="checkbox"/>
TWO LINES GRATED	<input checked="" type="checkbox"/>	<input type="checkbox"/>
SIDE EXTRACTION	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CROSSDRAFT	<input type="checkbox"/>	<input checked="" type="checkbox"/>
EX-PROOF LIGHTNING	<input type="checkbox"/>	<input checked="" type="checkbox"/>



Our booths with painting and drying feature is designed to suit your needs with special features and adequate insulation to take control of your operating costs.




TECHNICAL SPECIFICATION

ELEN-10 LW	APPLICATION TEMPERATURE	DRYING TEMPERATURE
	22°C - 25°C	60°C - 80°C

	UNIT	SCALED QUANTITY	
INT. DIMENSION	mm	10000(L)	4500(W) 4000(H)
EXT. DIMENSION	mm	10200(L)	4600(W) 4450(H)
LIGHTNING	W	48	X 58
MOTOR	KW	4	X 5,5
FAN CAPACITY	m ³ /h	2	X 36000
BURNER	Kcal/h	1	X 250000
ELECT. POWER	KW	TOTAL	30
VOLTAGE	V	max.	400

FEATURES

FEATURES	OK	OPTIONEL
SIDE LIGHTNING	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NATURAL GAS BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PIPE COIL EXCHANGER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIRECT FIRE BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIESEL BURNER	<input checked="" type="checkbox"/>	<input type="checkbox"/>
PLC CONTROL	<input checked="" type="checkbox"/>	<input type="checkbox"/>
TOUCHSCREEN	<input checked="" type="checkbox"/>	<input type="checkbox"/>
DIRECT DRIVE FAN	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RECUPERATOR	<input type="checkbox"/>	<input checked="" type="checkbox"/>
FEQ. INVERTER CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERVIS DOOR	<input checked="" type="checkbox"/>	<input type="checkbox"/>
AIR CHANELS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BURNER CHIMNEY	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BASEMENT CONSTRUCT.	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PRESSURE CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PNEUMATIC RAMP	<input type="checkbox"/>	<input checked="" type="checkbox"/>
WATER BASED READY	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FULL GRATED	<input type="checkbox"/>	<input checked="" type="checkbox"/>
TWO LINES GRATED	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SIDE EXTRACTION	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CROSSDRAFT	<input type="checkbox"/>	<input checked="" type="checkbox"/>
EX-PROOF LIGHTNING	<input type="checkbox"/>	<input checked="" type="checkbox"/>

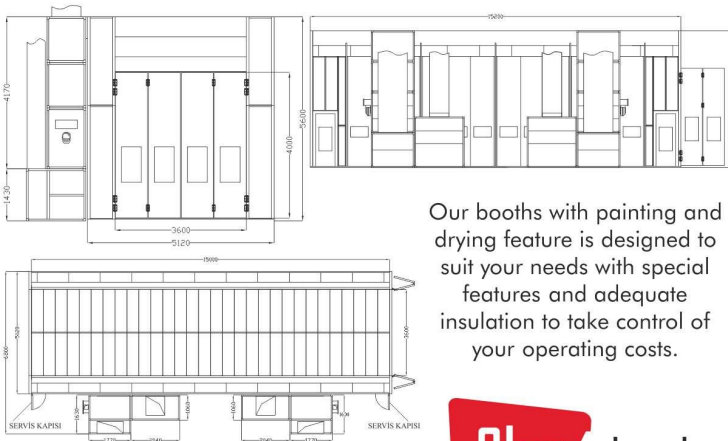

Our booths with painting and drying feature is designed to suit your needs with special features and adequate insulation to take control of your operating costs.



TECHNICAL SPECIFICATION

ELEN-15 BT	APPLICATION TEMPERATURE	DRYING TEMPERATURE
	22°C - 25°C	60°C - 80°C

	UNIT	SCALED QUANTITY		
INT. DIMENSION	mm	15000(L)	5000(W)	5000(H)
EXT. DIMENSION	mm	15200(L)	5100(W)	5650(H)
LIGHTNING	W	72	X	58
MOTOR	KW	8	X	5,5
FAN CAPACITY	m ³ /h	2	X	72000
BURNER	Kcal/h	2	X	300000
ELECT. POWER	KW	TOTAL		55
VOLTAGE	V	max.		400

FEATURES

FEATURES	OK	OPTIONEL
SIDE LIGHTNING	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NATURAL GAS BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PIPE COIL EXCHANGER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIRECT FIRE BURNER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
DIESEL BURNER	<input checked="" type="checkbox"/>	<input type="checkbox"/>
PLC CONTROL	<input checked="" type="checkbox"/>	<input type="checkbox"/>
TOUCHSCREEN	<input checked="" type="checkbox"/>	<input type="checkbox"/>
DIRECT DRIVE FAN	<input type="checkbox"/>	<input checked="" type="checkbox"/>
RECUPERATOR	<input type="checkbox"/>	<input checked="" type="checkbox"/>
FEQ. INVERTER CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERVIS DOOR	<input checked="" type="checkbox"/>	<input type="checkbox"/>
AIR CHANELS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BURNER CHIMNEY	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BASEMENT CONSTRUCT.	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PRESSURE CONTROL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PNEUMATIC RAMP	<input type="checkbox"/>	<input checked="" type="checkbox"/>
WATER BASED READY	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FULL GRATED	<input type="checkbox"/>	<input checked="" type="checkbox"/>
TWO LINES GRATED	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SIDE EXTRACTION	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CROSSDRAFT	<input type="checkbox"/>	<input checked="" type="checkbox"/>
EX-PROOF LIGHTNING	<input type="checkbox"/>	<input checked="" type="checkbox"/>



- Wet Coating Systems • Wet Painting Booths • Powder Coating Systems
- Powder Coating Booths • Painting and Drying Booths • Curing Ovens
- Surface Treatment Systems



72. Sk. No:2/6 Sasalı Sanayi
Bölgesi 35621 Çiğli-İZMİR/TURKEY

Tel : +90 (232) 449 85 05

Fax : +90 (232) 449 85 01

Gsm: +90 (533) 351 48 42

www.ema-tech.com.tr

info@ema-tech.net