

TWO-COMPONENT UV-RESISTANT POLYURETHANE VARNISH FOR CONCRETE - GLOSSY REAL PU TOPCOAT VARNISH 100

PRODUCT DESCRIPTION

REAL PU TOPCOAT VARNISH 100, Two component, polyurethane resin based, solvent topcoat, glossy surface finish.

TECHNICAL SPECIFICATIONS

Appearance	Glossy
Colour	Transparent
Intensity (gr./ml. 20°C)	1,02 ± 0,05
Mixing Ratio (By Weight)	Comp.: A 8 unit Comp.: B 2 unit
Solids by Weight (w/w)	% 75 ± 2
Nozzle (inch)	0,019-0,023"
Application Method	Airless Spray, Air Spray, Brush, Roller
Pot Life (20°C)	40-45 min.
Full Curing (day/20°C)	4-6 days



INSTITUTION INFORMATION (100 micron KFK)

	Touch Dry	Hard Drying	Waiting Between Floors Durations (Minimum)
-5°C	12 hour	29-30 hour	24 hour
0°C	9 hour	20-21 hour	18 hour
5°C	6 hour	13-14 hour	12 hour
15°C	120-160 min.	5-6 hour	3,5 hour
25°C	80-100 min.	3-4 hour	2 hour
35°C	60-80 min.	1,5-2 hour	1,5 hour

NOTE: As the application thickness increases, the drying time also

Consumption of Wet Film Thickness (μ)	Dry Film Thickness (μ)	Theoretical consumption rate for 8 mm stone carpets ± 10 (kg./m ²)
98	73	0,100

NOTE: As the application thickness increases, the drying time also

APPLICATION AREAS AND FEATURES

REAL PU VARNISH 100, Two component, polyurethane resin based top coat, glossy surface finish.

REAL VARNISH 100, Before application, the surface must be free of any moving parts that may prevent the adhesion of the product. dirt, oil, dust and paint should be removed with compressed air or sandblasting. Make sure that the floor is solid and load-bearing. The surface moisture content must be below 4% for cement based floors and below 1% for anhydrite screed coatings. Pour component B into component A first. The mixture is mixed with a low speed electric mixer until it becomes homogenous. Pour the thoroughly mixed material into a second, clean container and mix again for one minute. The prepared mixture is applied to the floor diagonally with a roller. In order to obtain good results, it is recommended to use a lint-free parquet varnish roller as an application tool. In order to prevent roller marks, it is necessary to go over the overlapping points again after 10 minutes. During the second coat application, a maximum consumption of 100-150 gr per m² should be observed. Otherwise, foaming may occur in some areas. The applied surface should be protected from water for 24 hours after application. It is a solvent type of polyurethane topcoat paint group. It is a product that can be cured at low temperatures, has high performance in terms of anticorrosive properties, and can be used where fast coat-on-coat and drying time is required.

MANUAL USAGE

Surface Preparation

The application surface is carefully cleaned from dirt, oil and grease. Loose old paint (on previously painted surfaces) is removed. Rust, dust and burrs on the surface are cleaned with diamond-tipped machine according to SA 2 ½ norms. application is done with brush, roller or gun. A mask should be used for spraying applications. Very good ventilation is required especially in small, closed areas.

REAL PU VARNISH 100 is thoroughly mixed separately before use. Then a homogeneous mixture is made with its own hardener. To prevent condensation, it is applied only on a dry and clean surface with a temperature above the dew point. Paint temperature should be 20-35°C. Thinning may be required with very long spray hoses and paint temperatures lower than 15°C. This may lead to lower film thickness and longer drying time.

Application is done by brush, roller or spray gun. A mask should be used for spray applications. Very good ventilation should be provided in closed areas.

AMBIENT CONDITIONS

Ambient temperature should be between +5°C and 35°C. Do not apply when the relative humidity exceeds 80%. The surface temperature should be at least 3-5 °C above the dew point to prevent surface condensation.

It should be known that the consumption will increase in windy weather. The surface temperature should be at least -5°C and at most 45°C.

PACKING

REAL WET 365 : Component A: 4 kg. & Component B: 1 kg.

TOTAL SET WEIGHT 5 kg.

-

REAL WET 365 : Component A: 12 kg. & Component B: 3 kg.

TOTAL SET WEIGHT 15 kg.

SHELF LIFE


The material should be stored in its original packaging in a cool and dry place. The storage life of the material in unopened packaging is 24 months for components A and B.



HEALTH AND SAFETY INFORMATION

- Read the MSDS form (Material Safety Data Sheet) for necessary safety rules and warnings. The minimum safety rules to be followed are as follows.
- Contact of the paint with skin and eyes should be prevented by using gloves, protective goggles, face mask, and industrial cream.
- Ensure adequate air circulation during application and until the paint dries.
- If paint comes into contact with skin, wash with warm water and soap or industrial cleaner. If splashed into eyes, rinse with water for at least 10 minutes and seek medical attention.
- Since such materials contain flammable components, they should be kept away from sparks and naked flames. Smoking should not be allowed in the area.
- All warning notices on the buckets must be read carefully and the recommended operating rules must be observed.

* Our information about the products is based on our own laboratory tests and research under normal conditions. Our company is not responsible for studies under unsuitable application conditions. The right to change this information is reserved by our company. Please contact R.Y.K. for more detailed information. Rev. No:09/Rev.Date: October 2022

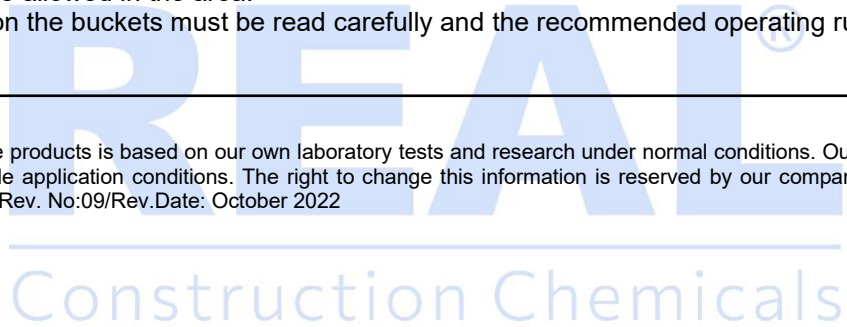

www.adacolor-bg.com

Sofia
6 "Andrey Germanov" str.
mobile: 089 666 3042 / 089 468 3880

Sofia, "Ovcha Kupel 1" quarter
33 "Promishlena" str., 429 bl., store 18,
mobile: 089 666 9071

Plovdiv
176 "Brezovsko shose" str.
mobile: 089 544 7503 / 089 666 3044

Varna
25 "Usta Kolyu Ficheto" str.
mobile: 089 666 9079 / 089 466 9023

Shumen, "Dobrudzhanski" quarter
Ind. zone, "Stroykomplekt" site
mobile: 089 455 1685 / 089 666 3043

Kardzhali
1 "Klokotnitsa" str.
mobile: 089 575 0749 / 089 666 3057

Troyan
49 "Makedoniya" str.
mobile: 089 666 9079 / 089 673 4489

Haskovo, 5 "Okolovrasten pat" str.
South Industrial zone
mobile: 089 666 3051 / 089 241 2833