

## TWO-COMPONENT, RELIEF EPOXY FLOOR COATING IN RAL CATALOGUE COLORS REAL GRN 785 TX

### PRODUCT DESCRIPTION

**REAL GRN 785 TX** is a two-component, relief epoxy floor coating an “orange peel” type finish sealing layer, based on a solvent-free epoxy resin.

### TECHNICAL SPECIFICATIONS

Appearance	Semi matte
Color	Optional from the RAL catalogue
Density (gr./ml. 20°C)	1,60 ± 0,05
Mixing ratio by weight	Comp.: A 86 unit Comp.: B 14 unit
Solids by weight (w/w)	% 98 ± 2
VOC content	<48 g/l
Compressive strength (7days)	46 N/mm <sup>2</sup>
Shore D hardness	74 ( 7 day / + 24°C, 50 % relative humidity)
Flexural strength (7 days)	22 N/mm <sup>2</sup>
Adhesion strength	≥ 2.7 N/mm <sup>2</sup>
Viscosity	Dense (thick)
Application method	Trowel, brush, roller
Wear resistance	68 mg ( 7 days / + 23°C)
Full drying at +22°C	4-7 days
Open working time at +20°C	45-50 min.



### DRYING INFORMATION (100 micron KFK)

	Touch Dry	Hard Drying	Waiting Drying Time Between Layers (minimum)
-5°C	12 hours	29-30 hours	24 hours
0°C	9 hours	20-21 hours	18 hours
5°C	6 hours	13-14 hours	12 hours
15°C	120-160 min.	5-6 hours	3,5 hours
25°C	80-100 min.	3-4 hours	2 hours
35°C	60-80 min.	1,5-2 hours	1,5 hours

**NOTES:** As the application thickness increases, consumption also increases.

Consumption Wet Film Thickness (μ)	Dry Film Thickness (μ)	Theoretical consumption rate ± 10 (kg./m <sup>2</sup> )
345	340	0,550

**NOTES:** As the application thickness increases, consumption also increases.

## APPLICATION AREAS AND FEATURES

**REAL GRN 785 TX** is relief epoxy floor coating that delivers excellent flooring surfaces in a wide range of colors.

**REAL GRN 785 TX** areas of use:

This relief epoxy floor coating is solvent-free an “orange peel”-type with high mechanical strength and abrasion resistance. It is stain-resistant (against tea, coffee, ketchup, saltwater, detergent water, engine oil, hydraulic oil, 20% caustic solution, 10% acetic acid solution), and easy to clean. It is used in parking garages, shops, factories, assembly workshops, warehouses, aircraft hangars, food industry facilities, hospitals, the chemical and pharmaceutical industries, power plants, spaces with high hygiene requirements, and all types of industrial floors.

## USAGE MANUAL

### Surface Preparation

The application surface must be thoroughly cleaned of contaminants such as oils and grease. Any peeling old paint (on previously painted surfaces) must be removed. Rust and surface irregularities should be cleaned using a machine with a diamond tip, in accordance with SA 2 ½ standards. When applying by spraying, wearing a mask is mandatory. Proper ventilation is especially important in small and enclosed spaces.

### Product Usage

Before use, of **REAL GRN 785 TX** the components should be thoroughly stirred separately. Then, the relief epoxy floor coating - **REAL GRN 785 TX** is mixed with the hardener(component B) and stirred until a homogeneous mixture is obtained. To prevent condensation, the material should only be applied to a clean and dry surface with a temperature above the dew point. The temperature of the floor coating should be between +20°C and +35°C. When using long spray hoses and when the temperature of the relief epoxy floor coating is below +15°C, thinning may be required, which can result in a thinner layer and longer drying time. The application method is carried out using a brush, roller, or spray gun. When applying by spraying, a mask must be worn.

## ENVIRONMENTAL CONDITIONS


The air temperature should be in the range of +15°C to +35°C. Application should not be carried out when the humidity exceed 80%. The surface temperature must be at least 3–5°C above the dew point to prevent condensation.

It should be noted that material consumption will increase when applied at lower temperatures. The surface temperature must be at least +5°C and no more than +45°C.

## PACKAGES

### REAL GRN 785 TX

Component A: 17,20 kg. Component B: 2,80 kg.  
Total set weight: 20 kg.

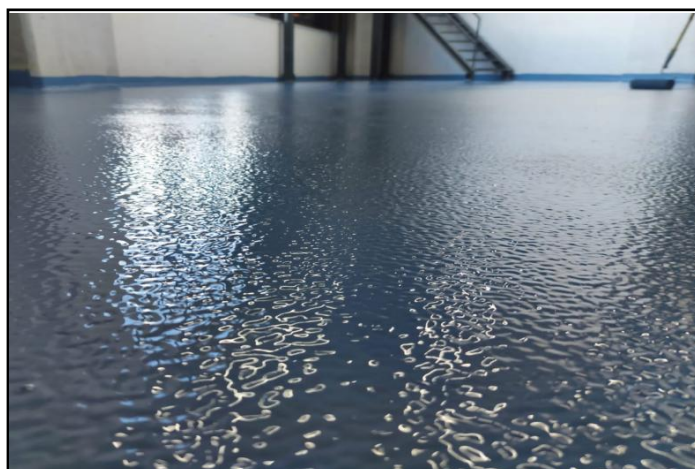

## SHELF LIFE

The material must be stored in its original packaging in a cool and dry place. The shelf life in unopened packaging is 24 months for components A and B.

## HEALTH AND SAFETY INFORMATION

Refer to the product's Material Safety Data Sheet (MSDS) for safety guidelines and warnings.

The most essential safety precautions to follow are:

Contact of the product with skin and eyes must be avoided by using gloves, safety goggles, a face mask, and protective cream.

Ensure proper ventilation during application and until the primer is fully dried.

In case of skin contact, wash the affected area with warm water, soap, or a suitable cleanser.

In case of eye contact, rinse thoroughly with water for at least 10 minutes and seek medical attention.

Carefully read all warning labels on the packaging and strictly follow the recommended working

\* Our information about the products is based on our own laboratory tests and researches under normal conditions. Our company is not responsible for studies under unsuitable application conditions. The right to change this information is reserved by our company. Please contact R.Y.K. for more detailed information

Rev. No:09/Rev.Date: October 2022



Sofia 6 "Andrey Germanov" str. mobile: 089 666 3042 / 089 468 3880	Sofia, "Ovcha Kupel 1" quarter 33 "Promishlena" str., 429 bl., store 18, mobile: 089 666 9071	Plovdiv 176 "Brezovsko shose" str. mobile: 089 544 7503 / 089 666 3044	Varna 25 "Usta Kolyu Ficheto" str. mobile: 089 666 9079 / 089 466 9023
Shumen, "Dobrudzhanski" quarter Ind.zone, "Stroykomplekt" site mobile: 089 455 1685 / 089 666 3043	Kardzhali 1 "Klokotnitsa" str. mobile: 089 575 0749 / 089 666 3057	Troyan 49 "Makedoniya" str. mobile: 089 666 9079 / 089 673 4489	Haskovo, 5 "Okolovrasten pat" str. South Industrial zone mobile: 089 666 3051 / 089 241 2833